

PANT THREE-WAY – PR1

Description:

Pant three-ways are terminated with frames made of profiles and are additionally reinforced with transverse sheet corrugation. The pant three-way splits the ductwork into two parallel ducts.

Characteristics:

Measurement: DIN 18379

Sheet type: galvanized




Connection method: seam lock, spot weld

Standard design: $x = 30 \text{ mm}$, $y = 30 \text{ mm}$, $w1 = 0^\circ$, $w2 = 0^\circ$

Endings: P20, P20 LR, P30, P30 LR, bare end, outward bending

Leakproofness standard: Class A, Class B, Class C

Stiffeners: available in larger dimensions

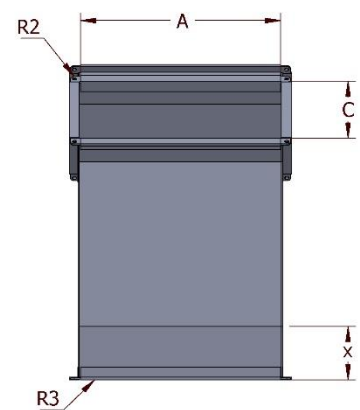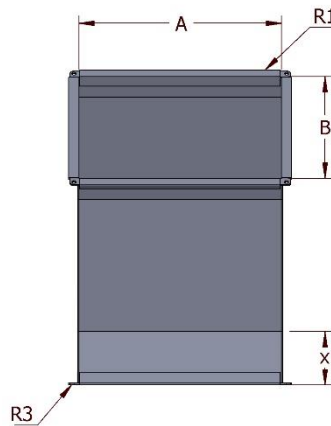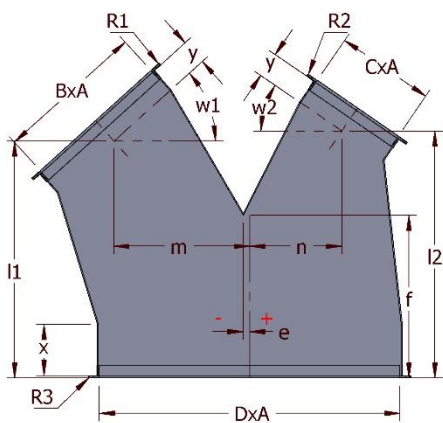

Sample manufactured element dimensions:

A (mm)	B (mm)	C (mm)	D (mm)	l1 (mm)	l2 (mm)	m (mm)	n (mm)	e (mm)	f (mm)	Area (m ²)
100	150	150	300	300	300	100	200	50	250	1.00
500	400	350	800	500	500	250	225	0	400	1.96
200	450	450	995	700	700	275	275	0	500	2.04