

# RECTANGULAR DUCT COLLAR – SS

## Description:

The collar is used for connecting a rectangular branch to a rectangular ventilation duct. It is fixed with rivets or screws to a previously prepared opening. Edges need to be sealed with silicone or acrylic sealant.

## Characteristics:

Measurement: DIN 18379

Sheet type: galvanized


Connection method: seam lock, spot weld

Standard design:  $h = 100 \text{ mm}$ ,  $W1 = 20 \text{ mm}$ ,

$W2 = 20 \text{ mm}$

Endings: P20, P20 LR, P30, P30 LR, bare end, outward bending

Leakproofness standard: Class A, Class B

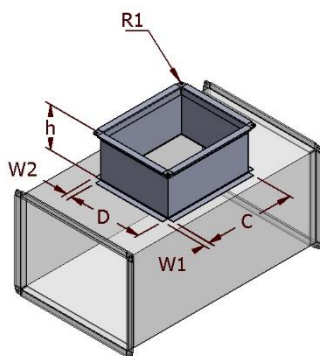

## Sample manufactured element dimensions:

C (mm)	D (mm)	h (mm)	Area (m <sup>2</sup> )
200	100	100	1.00
200	120	100	1.00
160	160	100	1.00
200	200	100	1.00
400	250	100	1.00
400	200	100	1.00
500	300	100	1.00
400	350	100	1.00
400	400	100	1.00
450	400	100	1.00