



ROOF BASE – PDA2

Description:

The roof base is used for installing a roof air intake/exhaust on a roof curb. The upper part of the base consists of a steel profile frame that allows for the installation of an air intake/exhaust. Below the base drip cap, there is a duct that may be installed on another duct, sunk into the roof curb.

Characteristics:

- Sheet type: galvanized
- Connection method: seam lock, spot weld
- Standard design: $E = D - 50 \text{ mm}$, $F = C - 50 \text{ mm}$, $f = 50 \text{ mm}$, $h = 200 \text{ mm}$, $H = 1000 \text{ mm}$
- Endings: P20, P20 LR, P30, P30 LR, bare end, outward bending
- Leakproofness standard: Class A, Class B, Class C
- Stiffeners: available in larger dimensions

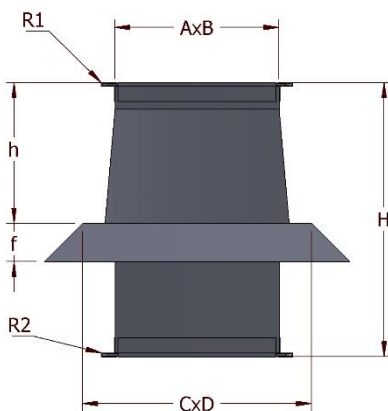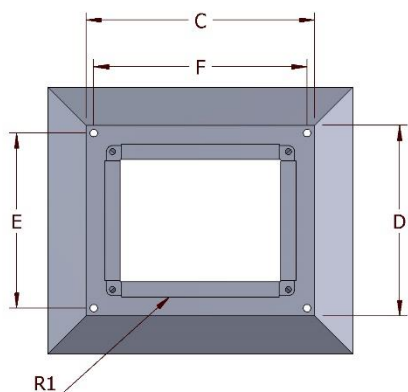

Sample manufactured element dimensions:

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	f (mm)	h (mm)	H (mm)
250	250	410	410	360	360	50	200	1000
400	400	560	560	510	510	50	200	1000
500	500	660	660	610	610	50	200	1000
600	600	760	760	710	710	50	200	1000
700	700	860	860	810	810	50	200	1000
800	800	960	960	910	910	50	200	1000
900	900	1060	1060	1010	1010	50	200	1000
1000	1000	1160	1160	1110	1110	50	200	1000